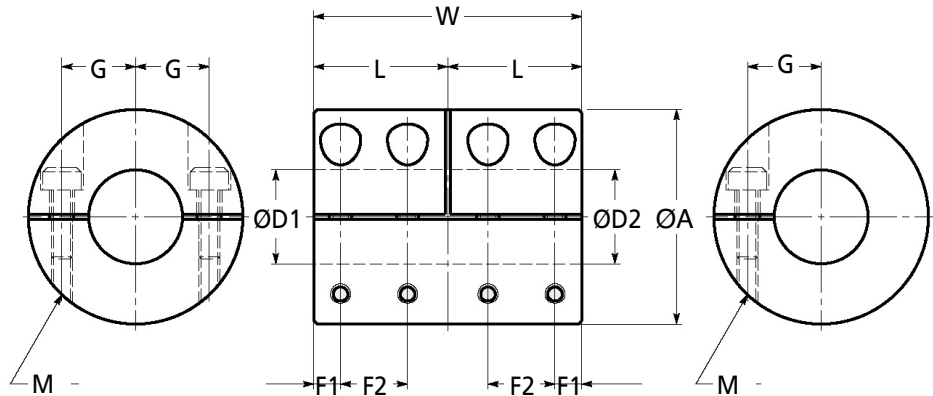


MLR-V

COUPLINGS

Miniature Aluminium Rigid Coupling

Long Version - Semi-Split Type


Discounts: 6+ -10% 16+ -15% 41+ -20% 100+ -25% 200+ -30% 400+ -35%

Part Number	Standard Bores H8 ØD1 ØD2	Max. Bore	ØA	L	W	F1	F2	G	M	Price Each 1 - 5
MLR-16V	6 6	6	16	11	22	2.5	5.5	5	M2	£21.89
MLR-20V	8 8	8	20	12	24	2.5	6.0	7	M2	£24.05
MLR-25V	10 10	12	25	18	36	4.5	9.0	9	M2.5	£26.44
MLR-32V	14 14	15	32	20	40	4.0	10.0	11	M3	£32.71

Part Number	Wrench Torque (Nm)	Rated Torque (Nm)	Max. Torque (Nm)	Max. rev per min (rpm) (min ⁻¹)	Moment of Inertia* (kg·m ²)	Mass* (g)
MLR-16V	0.5	0.3	0.6	9000	3.5x10 ⁻⁷	10
MLR-20V	0.5	0.5	1.0	7000	9.5x10 ⁻⁷	18
MLR-25V	1.0	1.0	2.0	6000	3.4x10 ⁻⁶	38
MLR-32V	1.5	2.0	4.0	4500	1.0x10 ⁻⁵	70

*Moment of inertia and mass figures based on the maximum shaft bores.

The maximum torque of the miniature coupling is two-fold of the rated torque.

Select a type in which torque generated during continuous operation does not exceed the rated torque of the miniature coupling.

Material

Aluminium alloy, Anodic Oxide coated.

Performance

Maximum Operating Temperature: 100°C.(approx.)

Ordering

e.g.

MLR-32V - Ø14 x Ø15

Type

ØD1

ØD2

Options

Keyways are available on request POA.

Can be bored out for larger bore sizes.

One-piece clamp type.

Stainless Steel version available

Features

- Long type rigid coupling. • Can be used as a joint to connect with shafts. • Recommended tolerance on shaft diameters is h6 and h7.
- Semi-split type features a combination of one clamp type hub and one split type hub. This fixing style enhances ease of assembly, because it is possible to attach on one shaft without sliding the other on the clamp type hub.

Other Info.

These rigid couplings transmit the torque and rotational angles while absorbing misalignments. When the misalignment exceeds allowable values, vibration may result or the life of the coupling may become shortened. Make sure to adjust the alignment accordingly.

There are three types of shaft misalignment, namely in terms of parallel misalignment, angular misalignment and shaft end-play. Adjust the alignment to be below allowable values listed in the specification table.

The maximum misalignment is the allowable value when only one of the misalignments exists alone. In case two or more misalignments exist at the same time, the allowable values shall be less than half of the maximum misalignment listed in the specification table.

We recommend you to adjust the shaft misalignment to be below 1/3 of maximum values for the elongation of the life of the coupling.

Important: Couplings and other rotational parts should be protected by covers for safety operation. Also, take note that operation under misalignment exceeding maximum values and excessive torque may result in shorter life of the coupling due to plastic deformation.

+44 (0)1246 455500

+44 (0)1246 455522

ondrives

sales@ondrives.com

www.ondrives.com

Product information updated 1st April 2011 and subject to change. Please contact Sales for the latest prices and availability.