


**SVSS**

# FASTENERS

## Imperial Socket Head Cap Screw with Ventilation Hole - No Surface Treatment

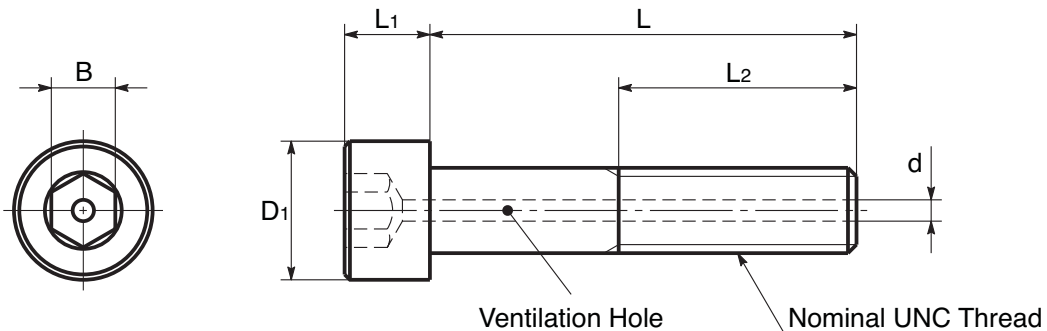

Part Number	L	D1	L1	L2 Min.	B	d Max.	Mass g	Qty. Per Pack	Price Per Pack 1 - 20
SVSS4-40X3/16	3/16"	0.183"	0.112"	Complete	3/32"	1.0mm	0.5	10	£P.O.A
SVSS4-40X1/4	1/4"	0.183"	0.112"	Complete	3/32"	1.0mm	0.6	10	£P.O.A
SVSS4-40X5/16	5/16"	0.183"	0.112"	Complete	3/32"	1.0mm	0.6	10	£P.O.A
SVSS4-40X3/8	3/8"	0.183"	0.112"	Complete	3/32"	1.0mm	0.7	10	£P.O.A
SVSS4-40X1/2	1/2"	0.183"	0.112"	Complete	3/32"	1.0mm	0.8	10	£P.O.A
SVSS4-40X5/8	5/8"	0.183"	0.112"	Complete	3/32"	1.0mm	0.9	10	£P.O.A
SVSS5-40X1/4	1/4"	0.205"	0.125"	Complete	3/32"	1.2mm	0.8	10	£P.O.A
SVSS5-40X5/16	5/16"	0.205"	0.125"	Complete	3/32"	1.2mm	0.9	10	£P.O.A
SVSS5-40X3/8	3/8"	0.205"	0.125"	Complete	3/32"	1.2mm	0.9	10	£P.O.A
SVSS5-40X1/2	1/2"	0.205"	0.125"	Complete	3/32"	1.2mm	1.1	10	£P.O.A
SVSS5-40X5/8	5/8"	0.205"	0.125"	Complete	3/32"	1.2mm	1.2	10	£P.O.A
SVSS6-32X1/4	1/4"	0.226"	0.138"	Complete	7/64"	1.2mm	1.0	10	£P.O.A
SVSS6-32X5/16	5/16"	0.226"	0.138"	Complete	7/64"	1.2mm	1.1	10	£P.O.A
SVSS6-32X3/8	3/8"	0.226"	0.138"	Complete	7/64"	1.2mm	1.2	10	£P.O.A
SVSS6-32X1/2	1/2"	0.226"	0.138"	Complete	7/64"	1.2mm	1.3	10	£P.O.A
SVSS6-32X5/8	5/8"	0.226"	0.138"	Complete	7/64"	1.2mm	1.5	10	£P.O.A
SVSS6-32X3/4	3/4"	0.226"	0.138"	Complete	7/64"	1.2mm	1.7	10	£P.O.A
SVSS6-32X1	1"	0.226"	0.138"	Complete	7/64"	1.2mm	2.0	10	£P.O.A
SVSS6-32X1-1/8	1 1/8"	0.226"	0.138"	Complete	7/64"	1.2mm	2.2	10	£P.O.A
SVSS8-32X1/4	1/4"	0.270"	0.164"	Complete	9/64"	1.5mm	1.5	10	£P.O.A
SVSS8-32X5/16	5/16"	0.270"	0.164"	Complete	9/64"	1.5mm	1.7	10	£P.O.A
SVSS8-32X3/8	3/8"	0.270"	0.164"	Complete	9/64"	1.5mm	1.8	10	£P.O.A
SVSS8-32X1/2	1/2"	0.270"	0.164"	Complete	9/64"	1.5mm	2.1	10	£P.O.A
SVSS8-32X5/8	5/8"	0.270"	0.164"	Complete	9/64"	1.5mm	2.3	10	£P.O.A

### Material

SUSXM7 (SUS304 Equivalent).

### Features

- May be used with vacuum chamber applications in clean rooms, FPD (Flat Panel Display) production equipment and semiconductor devices.
- All clean washed, minimising gas diffusion and preventing foreign particle inclusion.

### Options

Products chemical polishing are also available.

### Applications

Remove trapped gases in the pilot bore through the ventilation hole (SVSS) and gases between the threads through the washer (SWAS-VF) with ventilation grooves.

+44 (0)1246 455500  
+44 (0)1246 455522

**ondrives**


sales@ondrives.com  
www.ondrives.com

Product information updated 1st April 2011 and subject to change. Please contact Sales for the latest prices and availability.

# FASTENERS

SVSS

## Imperial Socket Head Cap Screw with Ventilation Hole - No Surface Treatment

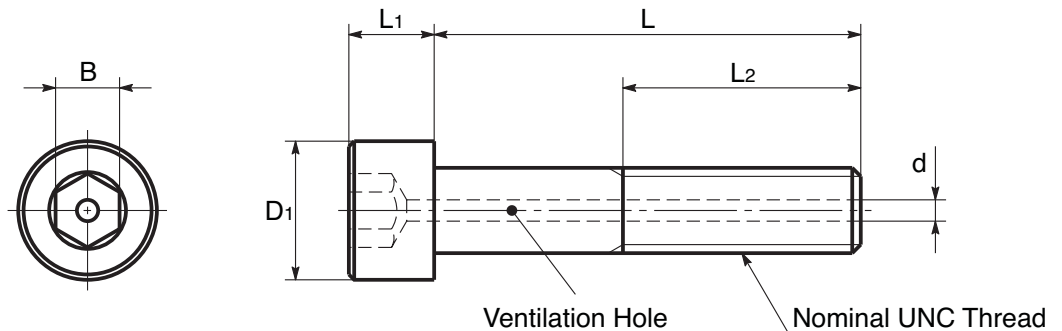

Part Number	L	D1	L1	L2 Min.	B	d Max.	Mass g	Qty. Per Pack	Price Per Pack 1 - 20
SVSS8-32X3/4	3/4"	0.270"	0.164"	Complete	3/4"	1.5mm	2.6	10	£P.O.A
SVSS8-32X1	1"	0.270"	0.164"	Complete	3/4"	1.5mm	3.1	10	£P.O.A
SVSS8-32X1-1/8	1 1/8"	0.270"	0.164"	Complete	3/4"	1.5mm	3.3	10	£P.O.A
SVSS10-24X1/4	1/4"	0.312"	0.190"	Complete	5/2"	1.5mm	2.3	10	£P.O.A
SVSS10-24X5/16	5/16"	0.312"	0.190"	Complete	5/2"	1.5mm	2.5	10	£P.O.A
SVSS10-24X3/8	3/8"	0.312"	0.190"	Complete	5/2"	1.5mm	2.6	10	£P.O.A
SVSS10-24X1/2	1/2"	0.312"	0.190"	Complete	5/2"	1.5mm	3.0	10	£P.O.A
SVSS10-24X5/8	5/8"	0.312"	0.190"	Complete	5/2"	1.5mm	3.3	10	£P.O.A
SVSS10-24X3/4	3/4"	0.312"	0.190"	Complete	5/2"	1.5mm	3.6	10	£P.O.A
SVSS10-24X1	1"	0.312"	0.190"	Complete	5/2"	1.5mm	4.3	10	£P.O.A
SVSS10-24X1-1/8	1 1/8"	0.312"	0.190"	Complete	5/2"	1.5mm	4.6	10	£P.O.A
SVSS10-24X1-1/4	1 1/4"	0.312"	0.190"	0.880"	5/2"	1.5mm	5.0	10	£P.O.A
SVSS10-24X1-1/2	1 1/2"	0.312"	0.190"	0.880"	5/2"	2.0mm	5.6	10	£P.O.A
SVSS1/4-20X5/16	5/16"	0.375"	0.250"	Complete	3/6"	2.0mm	4.6	10	£P.O.A
SVSS1/4-20X3/8	3/8"	0.375"	0.250"	Complete	3/6"	2.0mm	4.9	10	£P.O.A
SVSS1/4-20X1/2	1/2"	0.375"	0.250"	Complete	3/6"	2.0mm	5.5	10	£P.O.A
SVSS1/4-20X5/8	5/8"	0.375"	0.250"	Complete	3/6"	2.0mm	6.1	10	£P.O.A
SVSS1/4-20X3/4	3/4"	0.375"	0.250"	Complete	3/6"	2.0mm	6.7	10	£P.O.A
SVSS1/4-20X1	1"	0.375"	0.250"	Complete	3/6"	2.0mm	7.9	10	£P.O.A
SVSS1/4-20X1-1/8	1 1/8"	0.375"	0.250"	Complete	3/6"	2.0mm	8.5	10	£P.O.A
SVSS1/4-20X1-1/4	1 1/4"	0.375"	0.250"	Complete	3/6"	2.0mm	9.1	10	£P.O.A
SVSS1/4-20X1-1/2	1 1/2"	0.375"	0.250"	1"	3/6"	2.0mm	10.2	10	£P.O.A
SVSS1/4-20X1-3/4	1 3/4"	0.375"	0.250"	1"	3/6"	3.0mm	11.4	10	£P.O.A
SVSS1/4-20X2	2"	0.375"	0.250"	1"	3/6"	3.0mm	12.6	10	£P.O.A

