
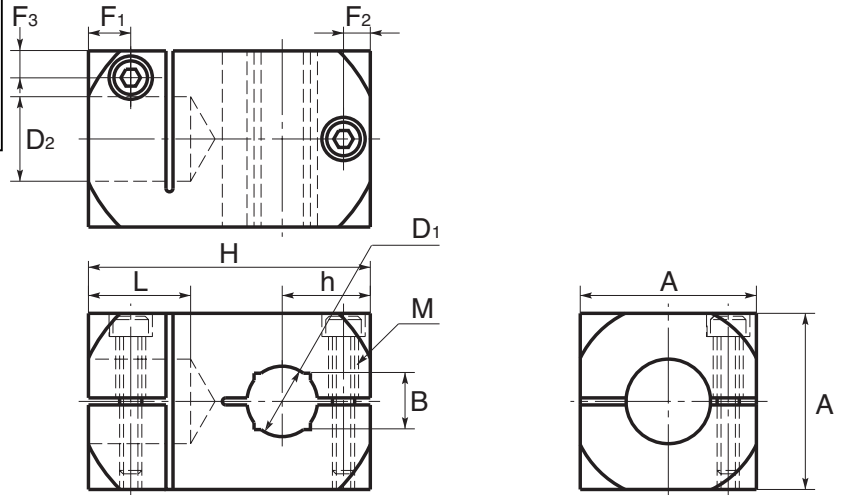


COUPLINGS

FCTA-C
FCTS-C

T-Cross Clampers - For Round & Square Shafts

Clamp Fixing : Aluminium & Stainless Steel

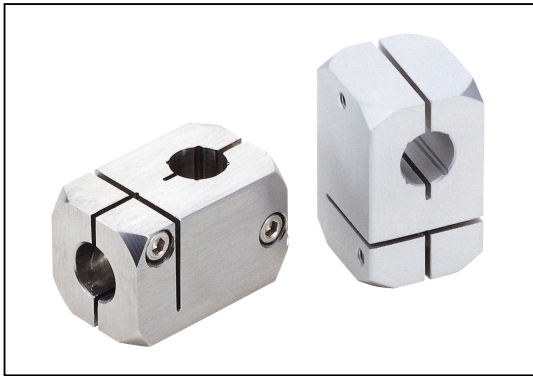

Discounts: 6+ -5% 20+ -10% 30+ -15% 50+ -20% 100+ -30%

Part Number	D1 H8*	D2 H8*	B H11*	A	H	L	h	F1	F2	F3	M	Mass (g)	Price Each 1 - 5
Aluminium													
FCTA8-10C	8	10	-	22	35	12.5	11.0	5.5	3.7	3.5	M3	37	£26.47
FCTA10-10C	10	10	8	22	35	12.5	11.0	5.5	3.7	3.5	M3	36	£26.47
FCTA10-12C	10	12	8	25	40	14.5	12.5	6.0	3.8	3.8	M3	54	£31.31
FCTA12-12C	12	12	10	25	40	14.5	12.5	6.0	3.8	3.8	M3	52	£31.31
FCTA10-15C	10	15	8	30	50	18.0	15.5	7.0	4.5	4.5	M4	101	£37.20
FCTA12-15C	12	15	10	30	50	18.0	15.5	7.0	4.5	4.5	M4	98	£37.20
FCTA15-15C	15	15	12	30	50	18.0	15.5	7.0	4.5	4.5	M4	93	£37.20
FCTA12-20C	12	20	10	38	63	21.5	20.0	9.0	5.5	5.3	M5	207	£44.47
FCTA15-20C	15	20	12	38	63	21.5	20.0	9.0	5.5	5.3	M5	201	£44.47
FCTA20-20C	20	20	16	38	63	21.5	20.0	9.0	5.5	5.3	M5	187	£44.47
Stainless													
FCTS8-10C	8	10	-	22	35	12.5	11.0	5.5	3.7	3.5	M3	111	£37.49
FCTS10-10C	10	10	8	22	35	12.5	11.0	5.5	3.7	3.5	M3	106	£37.49
FCTS10-12C	10	12	8	25	40	14.5	12.5	6.0	3.8	3.8	M3	161	£43.53
FCTS12-12C	12	12	10	25	40	14.5	12.5	6.0	3.8	3.8	M3	154	£43.53
FCTS10-15C	10	15	8	30	50	18.0	15.5	7.0	4.5	4.5	M4	300	£54.83
FCTS12-15C	12	15	10	30	50	18.0	15.5	7.0	4.5	4.5	M4	292	£54.83
FCTS15-15C	15	15	12	30	50	18.0	15.5	7.0	4.5	4.5	M4	276	£54.83
FCTS12-20C	12	20	10	38	63	21.5	20.0	9.0	5.5	5.3	M5	614	£75.47
FCTS15-20C	15	20	12	38	63	21.5	20.0	9.0	5.5	5.3	M5	595	£75.47
FCTS20-20C	20	20	16	38	63	21.5	20.0	9.0	5.5	5.3	M5	553	£75.47

*Dimension tolerance figures are shown before slit machining

Material

Body (FCTA-C): Aluminium (A6063), barrel polishing

Body (FCTS-C): Stainless Steel (SUS304), barrel polishing

Screw: Stainless Steel (SUS304)

Features


- Suitable for T-cross connecting two shafts. • No shaft damage through easy attachment/removal. • Space-saving. • Lightweight (Aluminium only).
- Corrosion resistant (Stainless Steel only).
- Supplied with hexagon socket head screws.

Options

Shafts can be made to order to suit these shaft holders.

Ordering Information

e.g.

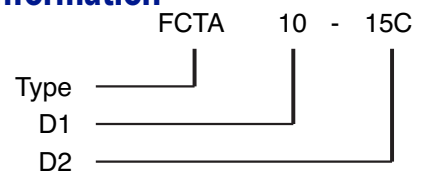

+44 (0)1246 455500

+44 (0)1246 455522

ondrives

sales@ondrives.com

www.ondrives.com

Product information updated 1st April 2011 and subject to change. Please contact Sales for the latest prices and availability.