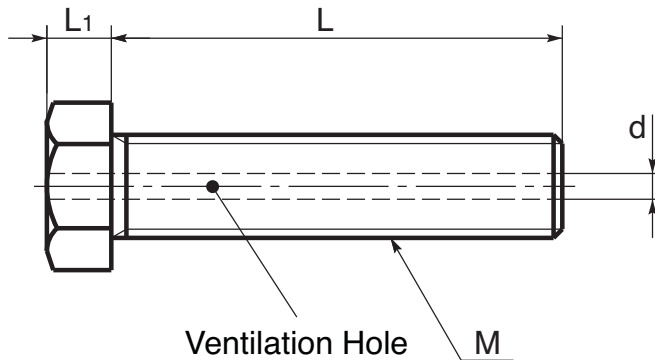

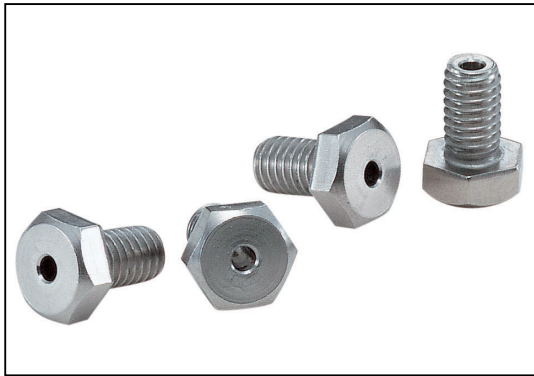


SVHS

FASTENERS

Hexagon Head Bolts

with Ventilation Hole - No Surface Treatment : M4 - M8

**Discounts: 21+ -10% 51+ -20%**

Part Number	M	L	e	L1	B	d max.	Mass g	Qty. Per Pack	Price Per Pack 1 - 20
SVHS-M4X10	M4	10	7.66	2.8	7	1.5	1.6	10	£P.O.A
SVHS-M4X12	M4	12	7.66	2.8	7	1.5	1.7	10	£P.O.A
SVHS-M4X16	M4	16	7.66	2.8	7	1.5	2.0	10	£P.O.A
SVHS-M4X20	M4	20	7.66	2.8	7	1.5	2.2	10	£P.O.A
SVHS-M5X10	M5	10	8.79	3.5	8	1.5	2.6	10	£P.O.A
SVHS-M5X12	M5	12	8.79	3.5	8	1.5	2.7	10	£P.O.A
SVHS-M5X16	M5	16	8.79	3.5	8	1.5	3.2	10	£P.O.A
SVHS-M5X20	M5	20	8.79	3.5	8	1.5	3.5	10	£P.O.A
SVHS-M5X25	M5	25	8.79	3.5	8	1.5	3.8	10	£P.O.A
SVHS-M6X16	M6	16	11.05	4.0	10	2.0	4.9	10	£P.O.A
SVHS-M6X20	M6	20	11.05	4.0	10	2.0	5.6	10	£P.O.A
SVHS-M6X25	M6	25	11.05	4.0	10	2.0	6.2	10	£P.O.A
SVHS-M8X16	M8	16	14.38	5.3	13	2.0	10.3	10	£P.O.A
SVHS-M8X20	M8	20	14.38	5.3	13	2.0	11.5	10	£P.O.A
SVHS-M8X25	M8	25	14.38	5.3	13	2.0	13.0	10	£P.O.A
SVHS-M8X30	M8	30	14.38	5.3	13	2.0	14.4	10	£P.O.A

Material

SUSXM7 (SUS304 Equivalent).

Options


Speciality-use product dimensions, profiles, materials, surface treatments, and special packaging.

Features

- May be used with vacuum chamber applications in clean rooms, FPD (Flat Panel Display) and semiconductor production equipment and devices.
- All clean washed, preventing the inclusion of oil and foreign particles.

Applications

Remove trapped gases in the pilot bore through the ventilation hole (SVHS) and gases between the threads through the washer (SWAS-VF) with ventilation grooves.

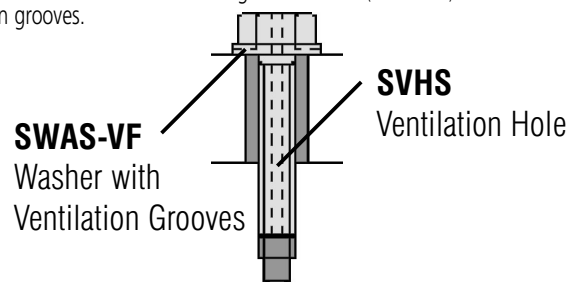

+44 (0)1246 455500
+44 (0)1246 455522

ondrives

sales@ondrives.com
www.ondrives.com

Product information updated 1st April 2011 and subject to change. Please contact Sales for the latest prices and availability.